





PROTEC PLUS







FRAMED PANEL MADE OF 6 GAUGE GALVANIZED WELDED WIRE WITH REINFORCING BENDS

- Perfect for securing job sites or perimeter
- ▲ Saferstack patented technology
- Double clamps or hook attachment system
- One person quick installation



DESCRIPTION	FINISH	DIMENSION (H x W)	WEIGHT	MODEL	QTY/PALLET	WEIGHT/PALLET
6'4" PROTEC PLUS SAFERSTACK	Galvanized	76 x 90 5/16 in.	54 lb (24.5 kg)	CT-TFP7696PLUSS	50	3,418 lb (1,550 kg)
6'4" PROTEC PLUS SAFERSTACK with hook	Galvanized	76 x 90 5/16 in.	55 lb (25 kg)	CT-TFP7696PLUSHS	50	3,468 lb (1,573 kg)
8'6" PROTEC PLUS	Galvanized	103 x 90 5/16 in.	80 lb (36.3 kg)	CT-TFP10396PLUSS	28	2,578 lb (1,169 kg)
8'6" PROTEC PLUS with hook	Galvanized	103 x 90 5/16 in.	78 lb (35.4 kg)	CT-TFP10396PLUSHS	28	2,606 lb (1,182 kg)

ADVICE: ADD 5/8" PER FENCE PANEL LENGTH TO CALCULATE THE REQUIRED LINEAR FEET



PROTEC







REGULAR PANEL MADE OF 6 GAUGE GALVANIZED WELDED WIRE AND REINFORCING BENDS

- Perfect for securing job sites or perimeter
- Saferstack patented technology
- Double clamps or hook attachment system
- One person quick installation



DESCRIPTION	FINISH	DIMENSIONS (H x W)	WEIGHT	MODEL	QTY/PALLET	WEIGHT/PALLET
6' PROTEC SAFERSTACK	Galvanized	71 x 90 5/16 in.	46 lb (20.9 kg)	CT-TFP7296S	60	3,608 lb (1,637 kg)
6' PROTEC SAFERSTACK with hook	Galvanized	71 x 90 5/16 in.	47 lb (21.3 kg)	CT-TFP7296HS	60	3,668 lb (1,664 kg)
8' PROTEC SAFERSTACK	Galvanized	98 x 90 5/16 in.	63.5 lb (28.8 kg)	CT-TFP9696S	45	3,473 lb (1,575 kg)
8' PROTEC SAFERSTACK with hook	Galvanized	98 x 90 5/16 in.	64.5 lb (29.3 kg)	CT-TFP9696HS	45	3,518 lb (1,596 kg)





PROTEC SQUARE





SQUARE TUBED REINFORCED PANEL MADE OF 10 GAUGE GALVANIZED WELDED WIRE

- Direct container order only
- Horizontal reinforcing bar
- U-Shape attachment system

DESCRIPTION	FINISH	DIMENSION (H x W)	WEIGHT	MODEL	QTY/CONTAINER
6' PROTEC SQUARE	Powder coated	72 X 114 1/4 in.	65 lb (29.3 kg)	CT-TFP72120SQ	400
6' PROTEC SQUARE	Zinc plated	72 X 114 1/4 in.	65 lb (29.3 kg)	CT-TFP72120SQZN	400
6' PROTEC SQUARE	Zinc plated + powder coated	72 X 114 1/4 in.	65 lb (29.3 kg)	CT-TFP72120SQZNSP	400
6' PROTEC SQUARE	Galvanized	72 X 114 1/4 in.	65 lb (29.3 kg)	CT-TFP72120SQGV	400
6' PROTEC SQUARE	Galvanized + powder coated	72 X 114 1/4 in.	65 lb (29.3 kg)	CT-TFP72120SQGVSP	400
8' PROTEC SQUARE	Powder coated	96 X 114 1/4 in.	80 lb (36.3 kg)	CT-TFP96120SQ	320
8' PROTEC SQUARE	Zinc plated	96 X 114 1/4 in.	80 lb (36.3 kg)	CT-TFP96120SQZN	320
8' PROTEC SQUARE	Zinc plated + powder coated	96 X 114 1/4 in.	80 lb (36.3 kg)	CT-TFP96120SQZNSP	320
8' PROTEC SQUARE	Galvanized	96 X 114 1/4 in.	80 lb (36.3 kg)	CT-TFP96120SQGV	320
8' PROTEC SQUARE	Galvanized + powder coated	96 X 114 1/4 in.	80 lb (36.3 kg)	CT-TFP96120SQGVSP	320

ADVICE: ADD 5/8" PER FENCE PANEL LENGTH TO CALCULATE THE REQUIRED LINEAR FEET



PANEL FOR JERSEY







TOP MOUNTED SECURITY FENCE FOR PRECAST CONCRETE BARRIERS.

- Excellent for vehicular traffic and pedestrian control
- Higher safety of potentially dangerous areas
- ▲ Panel secured to the concrete barrier with bolts
- Galvanized maintenance-free framed panel

DESCRIPTION	FINISH	DIMENSION (H x W)	WEIGHT	MODEL	QTY/PALLET	WEIGHT/PALLET
PANEL FOR CONCRETE JERSEY	Galvanized	52 x 76 in.	33.5 lb (15.2 kg)	CT-TFP5276PLUSH	N/A	N/A





SECURIGARD







STURDY PANEL MADE OF 6 GAUGE GALVANIZED WIRE WELDED TO A TUBED FRAME OF 1 $\frac{1}{2}$ "

- ▲ Lighter and economical
- Restricted opening

- Optional 3" base for interior and toeboard
- Height of 3 ½ feet

DESCRIPTION	FINISH	DIMENSION (H x W)	WEIGHT	MODEL	QTY/PALLET	WEIGHT/PALLET
42" SECURIGARD	Galvanized	42 x 86 in.	36 lb (16.3 kg)	CT-SECGARDGV	30	1,410 lb (640 kg)



SECURICROWD





STURDY PANEL MADE OF $\frac{1}{2}$ " Galvanized round tubes welded to a tubed frame of 1 $\frac{1}{2}$ "

- Industry compatible
- Welded hook attachment system
- Height of 3 ½ feet

 DESCRIPTION
 FINISH
 DIMENSION (H x W)
 WEIGHT
 MODEL
 QTY/PALLET
 WEIGHT/PALLET

 42" SECURICROWD
 Galvanized
 42 x 101 in.
 58.9 lb (26.7 kg)
 CT-SECCTYGV
 30
 2,065 lb (937 kg)



COMPACT AND SECU STORAGE SYSTE

AVAILABLE ACCESSORIES

PROTEC & PROTEC PLUS

PS PROTEC SQUARE


S SECURIGARD

SC SECURICROWD

G ACCESS GATE

J PANEL FOR CONCRETE JERSEY

PRODUCT	TYPE	DESCRIPTION	FINISH	MODEL	WEIGHT	
i n			Powder coated	CT-TFBPSQ	11 LB (5 KG)	
PS		Base plate	Zinc plated	CT-TFBPSQZN	11 LB (5 KG)	
			Galvanized	CT-TFBPSQGV	11 LB (5 KG)	
			Powder coated	CT-UCOUPLERSQ	0.75 lb (0.3 kg)	
	_		Zinc plated	CT-UCOUPLERSQZN	0.75 lb (0.3 kg)	
- 11	PS	U-shape	Galvanized	CT-UCOUPLESQGV	0.75 lb (0.3 kg)	
u j			Zinc plated + powder coated	=	0.75 lb (0.3 kg)	
_			Galvanized + powder coated	CT-UCOUPLESQGVSP	0.75 lb (0.3 kg)	
53	P	Double clamp	Galvanized	CT-TFDCGK	0.75 lb (0.3 kg)	
0.00	P	Gate latch and finger kit	Galvanized	CT-TFLGF	2 lb (0.9 kg)	
al ^e	P	Gate hinge kit	Galvanized	CT-TFHG	4.24 lb (1.9 kg)	
	P	Fence stabilizer	Galvanized	CT-STABILGV	5.3 lb (2.4 kg)	
	P	SAFERSTACK transport and storage system	Galvanized	CT-SAFERRACK	253 lb (115 kg)	
1	P	Identification plate	N/A	CT-PLAQUEIDGEN	N/A	
	P	Pedestrian access gate	Galvanized	CT-TAGK	49 lb (22 kg)	
		Dall of fonce netting	Black	CT-TFNET6BK	37 LB (16.8 kg)	
P	P	Roll of fence netting 72" X 150' (90% shade)	Green	CT-TFNET6GN	37 LB (16.8 kg)	
		72 % 100 (00% onduc)	Blue	CT-TFNET6BL	37 LB (16.8 kg)	
P		Roll of fence netting	Black	CT-TFNET8BK	45 LB (20.5 kg)	
	96" X 150' (90% shade)	Green	CT-TFNET8GN	45 LB (20.5 kg)		
1			Blue	CT-TFNET8BL	45 LB (20.5 kg)	
	PS	Reinforced base plate	Galvanized	CT-TFBPG	11 lb (5 kg)	
lament .	S	Toeboard	Galvanized	CT-SGTBGV	10 lb (4.5 kg)	
1	\$	Fixed square base plate	Galvanized	CT-SECBPFGV	2.7 lb (1.2 kg)	
_	SD	Base plate (Receiver side)	Galvanized	CT-TFBPCTYRGV	3.2 lb (1.5 kg)	
$\overline{}$	SD	Base plate (Hook side)	Galvanized	CT-TFBPCTYHGV	4.7 lb (2.1 kg)	
	G	Access gate top arch	Galvanized	CT-TAGT	17 lb (7.7 kg)	
A TO SERVE	G	Top arch identification	N/A	ETI-TAGTL	0.25 lb (0.1 kg)	
	G	Access gate base	Galvanized	CT-TAGB	32 lb (14.5 kg)	
	J	Side fence base	Galvanized	CT-TFPJSEBP	2.9 lb (1.3 kg)	
H	J	Middle fence base	Galvanized	CT-TFPJSMBP	3.2 lb (1.5 kg)	
	J	Fence connection	Galvanized	CT-TFPJSC	2.7 lb (1.2 kg)	






Access gate top arch ETI-TAGTL Top arch identification CT-TAGK Galvanized


CT-STABILGV Galvanized fence stabilizer



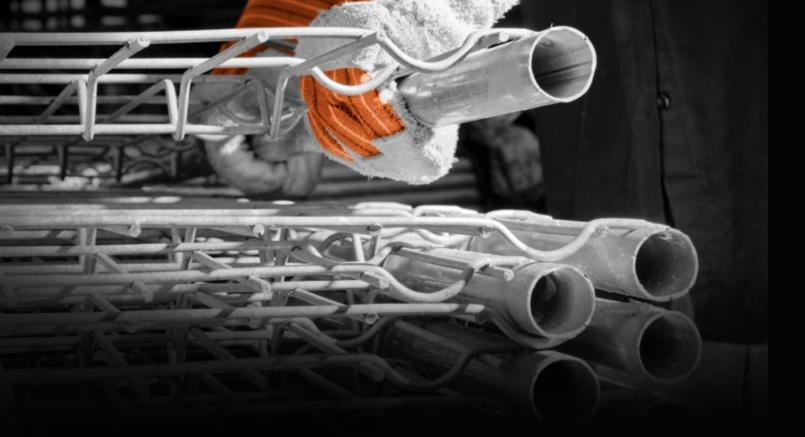

SAFERSTACK®

SAFERSTACK® PANELS INTERLOCKS FIRMLY INTO PLACE MAKING IT **ECONOMICAL** AND **SECURE**.

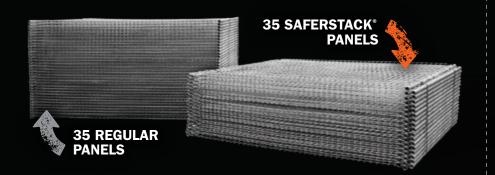

ADVANTAGES

SAVINGS

- Up to 40% in storage space reduction.
- Increased loading capacity per truckload.
- Reduced fuel costs.

INCREASED SAFETY

- Fence panels interlock to prevent slippage when stacked.
- Fewer work related accidents.
- ▲ Fewer insurance claims.





METALTECH SALE OFFICE:

1735 St-Elzear Blvd. West, Laval (Quebec) Canada H7L 3N6 T 450 681-6440 / 1 800 363-7587 | F 450 681-7905 www.metaltech.co | customerservice@metaltech.co

